11/28/2017

COMFORT SLEEPER (Ver.8)

DISASSEMBLY & REASSEMBLY INSTRUCTIONS





Tools: 1/2" & 7/16" sockets, 7/16" wrench, wood block 5" tall, or mallet plus wood block = 5" (Impact driver optional)




Tilt sofa forward onto its Front Arms

High Leg Sleeper with "Ear" that extends over the arm





Open bed as shown

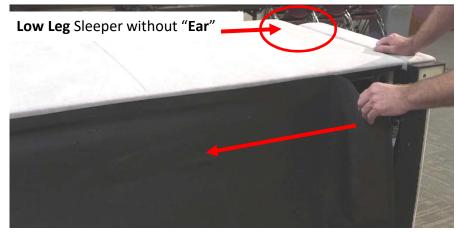

Unhook Velcro holding Dust Cover to back edge of sofa (Low leg sleepers only)



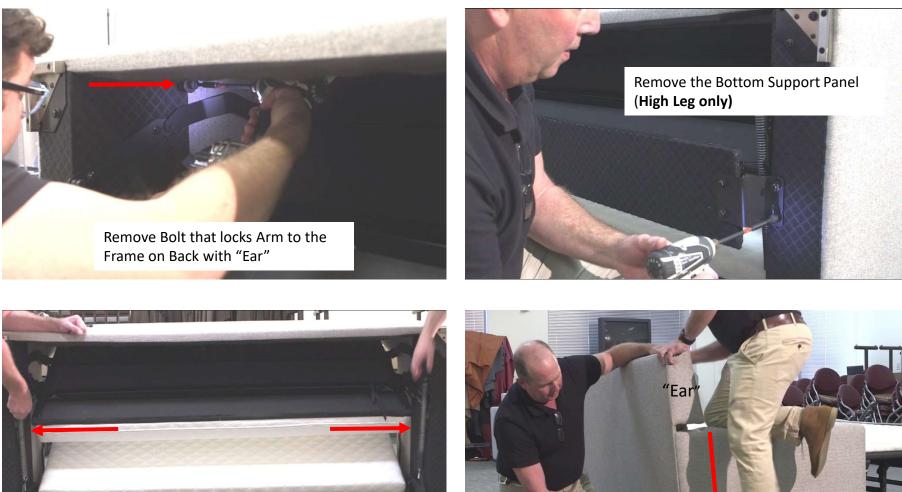

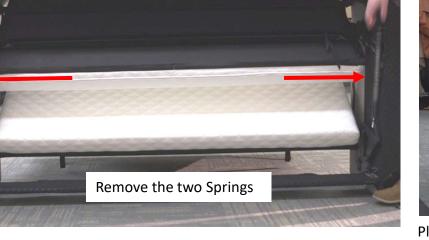




Place a 5" Block under the Back, near the Arm, and press down on the top of the Arm as shown to release the Back from the Arm on both sides of the sofa







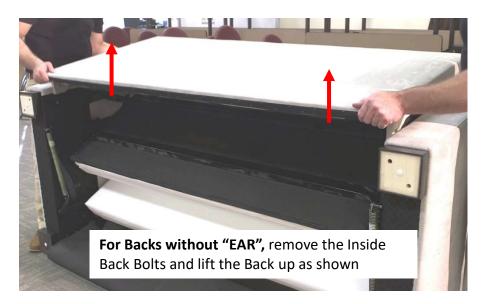







Lift Middle and Front Mattress Assembly away from the sofa and fold it on the floor












Remove 2 Bolts from each side of the Camel Hump Rail

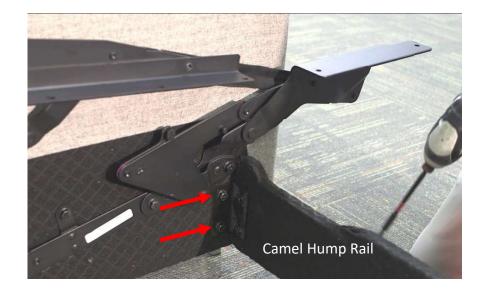






Install 2 Bolts on each side of the Camel Hump Rail



Install the Square Back Tube with 7/16" socket and wrench – Tube mounts on **TOP** of bracket



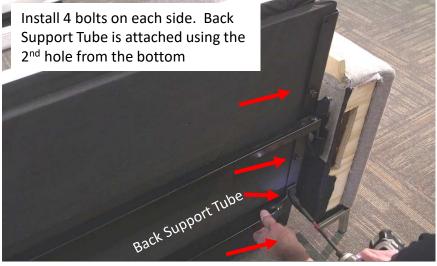





Open the Mech and Place Middle and Front Mattress Assembly onto Mech Brackets



Install 2 Bolts through the Bracket on each side

